



**jászplastik**

**Battery Division**

## Technical data sheet


### Starter battery

<b>Battery type</b>	<b>12V 130Ah +R Tipo H13</b>	<b>Product code</b>	<b>GB1300</b>
---------------------	------------------------------	---------------------	---------------

Specification	
Nominal voltage	12 V
Capacity (C20)	130 Ah at 25°C to 10,5V
Cold cranking current (EN 18°C)	740 A
Cold cranking current (DIN 18°C)	450 A
Weight	30.0 kg ± 5%
Technology	Flooded/SLI

Overall dimensions	
Length	344 +0/-4 mm
Width	171 +0/-2 mm
Height	283 +0/-3 mm
Base hold-down	B00
Layout	0
Terminal type	1
Container material	PP
Box color	Black
Lid color	Black
Plug	

Electrolyte	
Electrolyte type	H <sub>2</sub> SO <sub>4</sub>
Electrolyte spec density at 25°C	1.28 ± 0.01 g/cm <sup>3</sup>

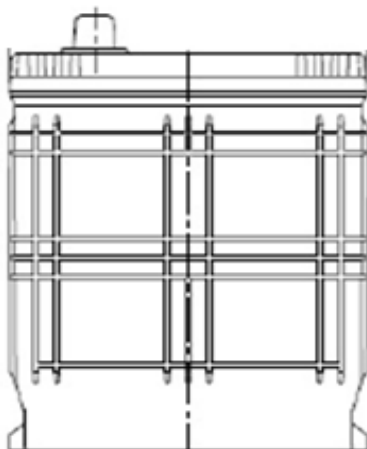

Cell properties	
Grid prod. technology	Gravity casted
+ grid alloy	PbSb
+ strip / grid thickness	1.7 mm
(-) grid	Dk1.3
Grid prod. technology	Gravity casted
- grid alloy	PbSb
- strip / grid thickness	1.3 mm
Separator	
Type	PE
Thickness	1.4 mm

Drawings	
Base hold-down	Layout

Terminal type	Key characteristics
	<ul style="list-style-type: none"> <li>- Low water consumption</li> <li>- Meets EN requirement (EN 2) and vibration resistance (V1)</li> </ul>

