



Technical data sheet

jászplastik

Battery Division

Starter battery

| | | | |
|---------------------|-------------------------|---------------------|----------------|
| Battery type | 12V 105Ah +D M11 | Product code | GBJ1050 |
|---------------------|-------------------------|---------------------|----------------|


| Specification | |
|----------------------------------|-------------------------|
| Nominal voltage | 12 V |
| Capacity (C20) | 105 Ah at 25°C to 10,5V |
| Reserve capacity (25A discharge) | 122 min |
| Cold cranking current (EN 18°C) | 720 A |
| Cold cranking current (DIN 18°C) | 420 A |
| Weight | 22.0 kg ± 5% |
| Technology | Flooded/SLI |

| Overall dimensions | |
|--------------------|--------------|
| Length | 303 +0/-2 mm |
| Width | 173 +0/-2 mm |
| Height | 225 +0/-3 mm |
| Base hold-down | B03 |
| Layout | 0 |
| Terminal type | 1 |
| Container material | PP |
| Box color | Black |
| Lid color | Black |

| Electrolyte | |
|----------------------------------|--------------------------------|
| Electrolyte type | H ₂ SO ₄ |
| Electrolyte spec density at 25°C | 1.28 ± 0.01 g/cm ³ |

| Cell properties | |
|--------------------------|----------------|
| Grid prod. technology | Punched |
| + grid alloy | PbCa |
| + strip / grid thickness | 0.9 / 1.3 mm |
| (-) grid | CE- |
| Grid prod. technology | Expanded |
| - grid alloy | PbCa |
| - strip / grid thickness | 0.75 / 1.25 mm |
| Separator | |
| Type | PE |
| Thickness | 1.0 - 1.2 mm |

| Drawings | |
|-----------------------|---------------|
| Base hold-down | Layout |
| | |

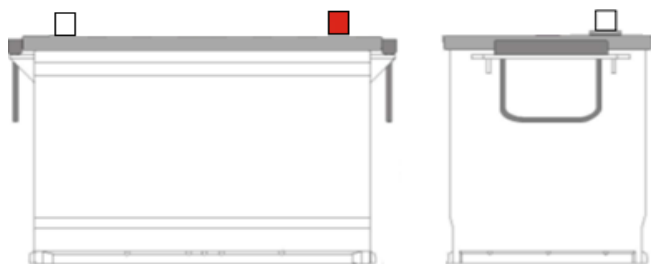

| Terminal type | Key characteristics |
|---------------|--|
| | <ul style="list-style-type: none"> - Maintenance free - Wide range of application - Universal EN design - Lid type: K2 with push in plug |